


## Master Controller

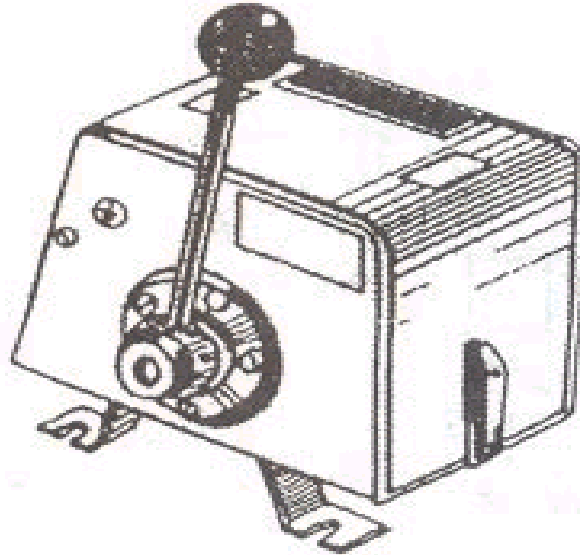

### Introduction

**Master controllers** are used for operation of contractor's equipment controlling E.O.T. Cranes & Rolling mills drives. The controllers are made in dust proof enclosure in IP-54 degree of protection, up to 6 notches either side with maximum 24 contacts as per desired sequence with spring return arrangement & deadman's handle arrangement are available. Master Controllers are compact up to 4-0-4 step suitable for Grab-Hoist, CT-LT maximum contacts 16 per motion with spring return arrangement.

### Technical Specification

Body Material	M.S sheet
Enclosure	IP-44/IP-54
Mounting Position	Horizontal/Vertical
Rated Voltage	500 V
Cable entry	2x 20 / 2x26 Conduit
Thermal Test Current	10 amp
Frequency of operation	1000 switching per hour
No. of contacts	24 maximum
No.of step	6-0-6 maximum
Optional arrangement	Spring return/deadman's Handle
Contact Material	Silver Cadmium